


VPH-0808-CTU (Slim)

(Compact Model)

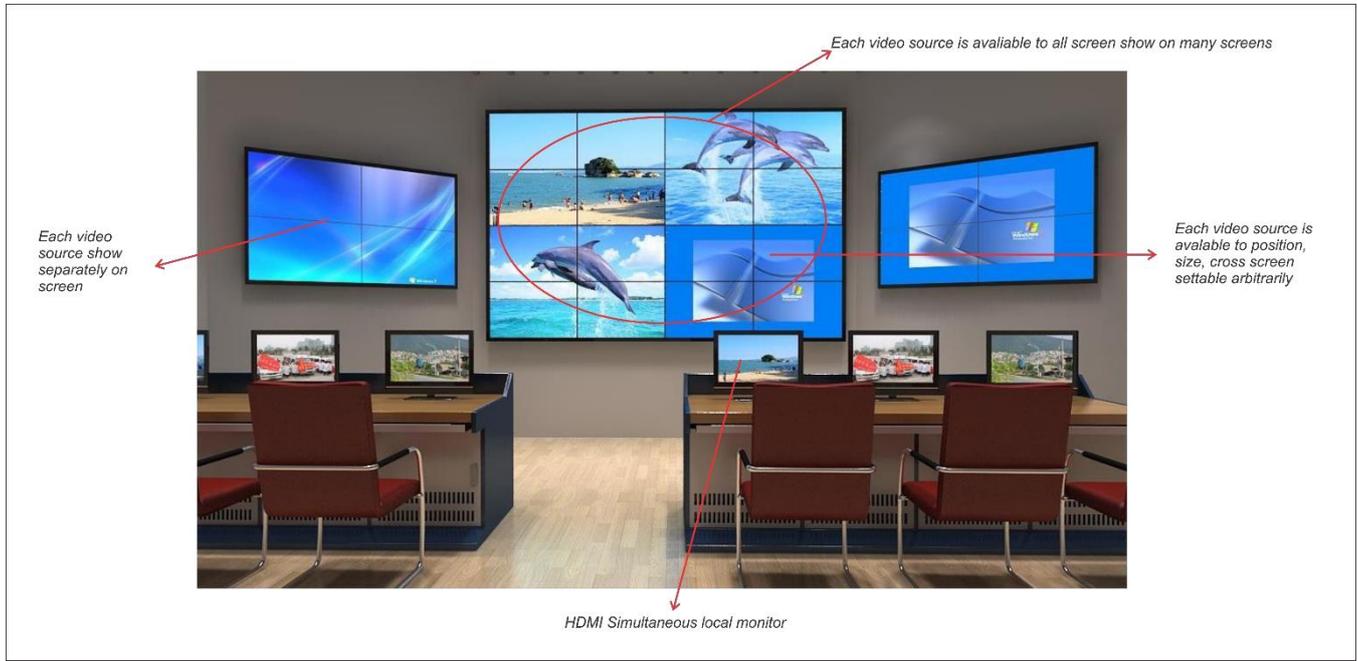

Overview

VPH 0808 CTU Compact is a cost effective video wall controller from Vewell. The new generation VPH processes stable and reliable operation ability, at the same time supports 2 layers video windows per output capability layering, moving, stretching, roaming.

It is a great solution for exhibition, education, meeting room, command center, monitoring room.

Features

- Pure Hardware structure
- All in One Design
- Seamless Switching
- Rackmount model
- Less power consumption
- Easy to control
- 24/7 hours
- Easy to maintenance
- Picture in picture

1 Single-screen multi-window any super-roaming

Single-screen support multi-window various types of signal superposition, roaming, window display.



2 Support ultra-high-definition 4K signal acquisition


You can collect various types of DL-DVI, DP, HDMI1.4 4K signal, providing more shocking and clear display.



4K UHD

3


Pure hardware architecture
board any combination

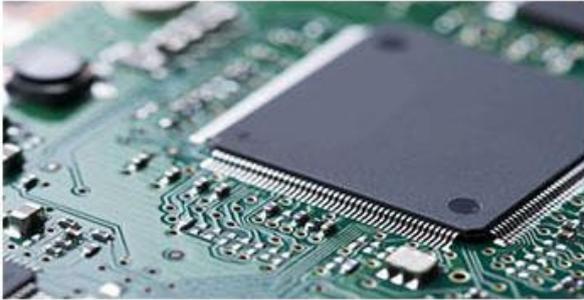

Industrial chassis with CPCI structure. Modular design, dual backup redundant power supply support hot backup, fan and other modules at will. Can support the system processing module hot-swappable, provide various types of chassis and board, for customers to save costs.

Multi - group video wall management

Can be several groups of mosaic wall management, mosaic wall between the common input signal source, the output without interference with each other, you can set a different resolution, adjust the color and other parameters.

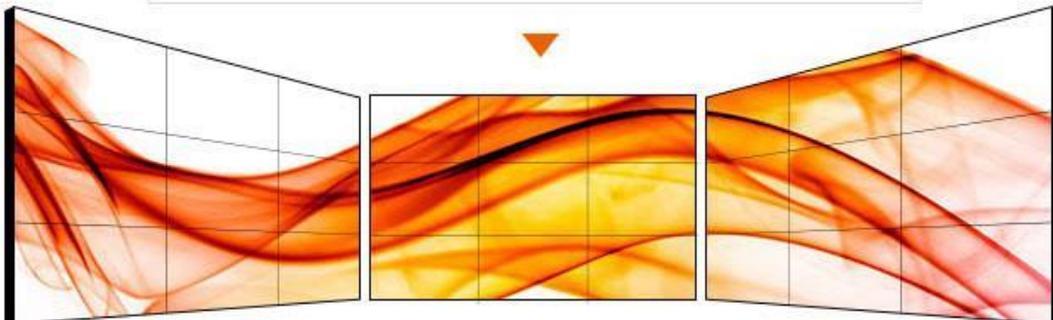

4 Support PC and mobile control software pre-monitoring display

Support the user in the PC and the mobile side of the control software for all input signals in real-time preview, you can more intuitive choice need to operate the signal source. At the same time in the interface can watch large-screen real-time echo images, improve the efficiency of the operator and prevent the wrong operation.




iOS  Support for Apple IOS control

5 Integrated control function



Integrated control serial port control Interface.
Can be transferred out RS232 type command,
control the projector, large screen switch, and so on.

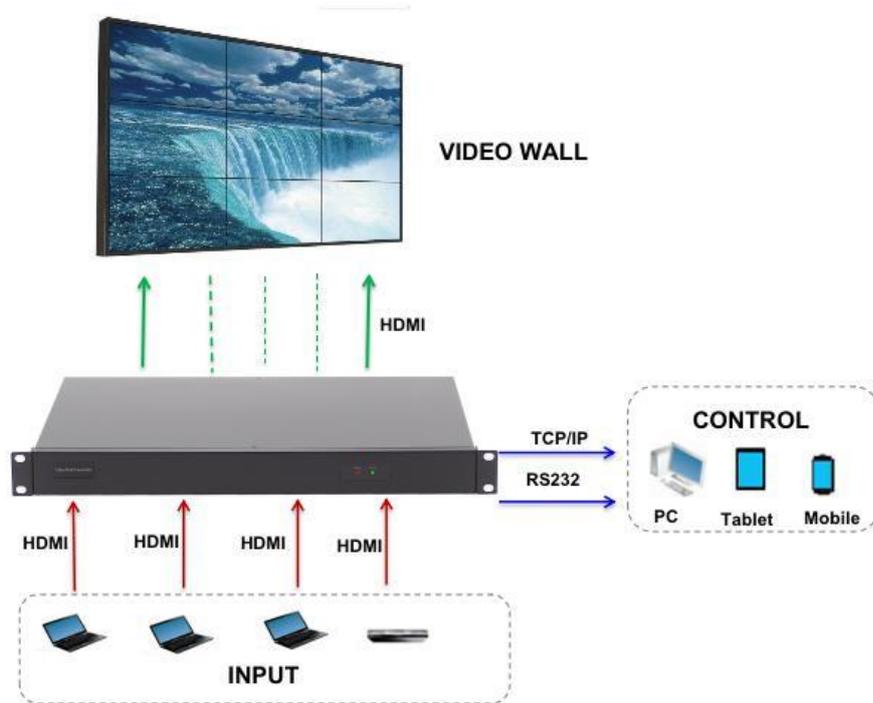

Specification

Model	VPH 0808 CTU
Chassis size	1U
Input port	8
Output port	8
Input Interface	HDMI
Output interface	HDMI
Input resolution	1920 x 1200
Output resolution	1920 x 1200
Image layer	2
Power supply	100~240V 50-50Hz
Working temperature	20C-+70C
Control method	RS232, IP (Wireless)